


202

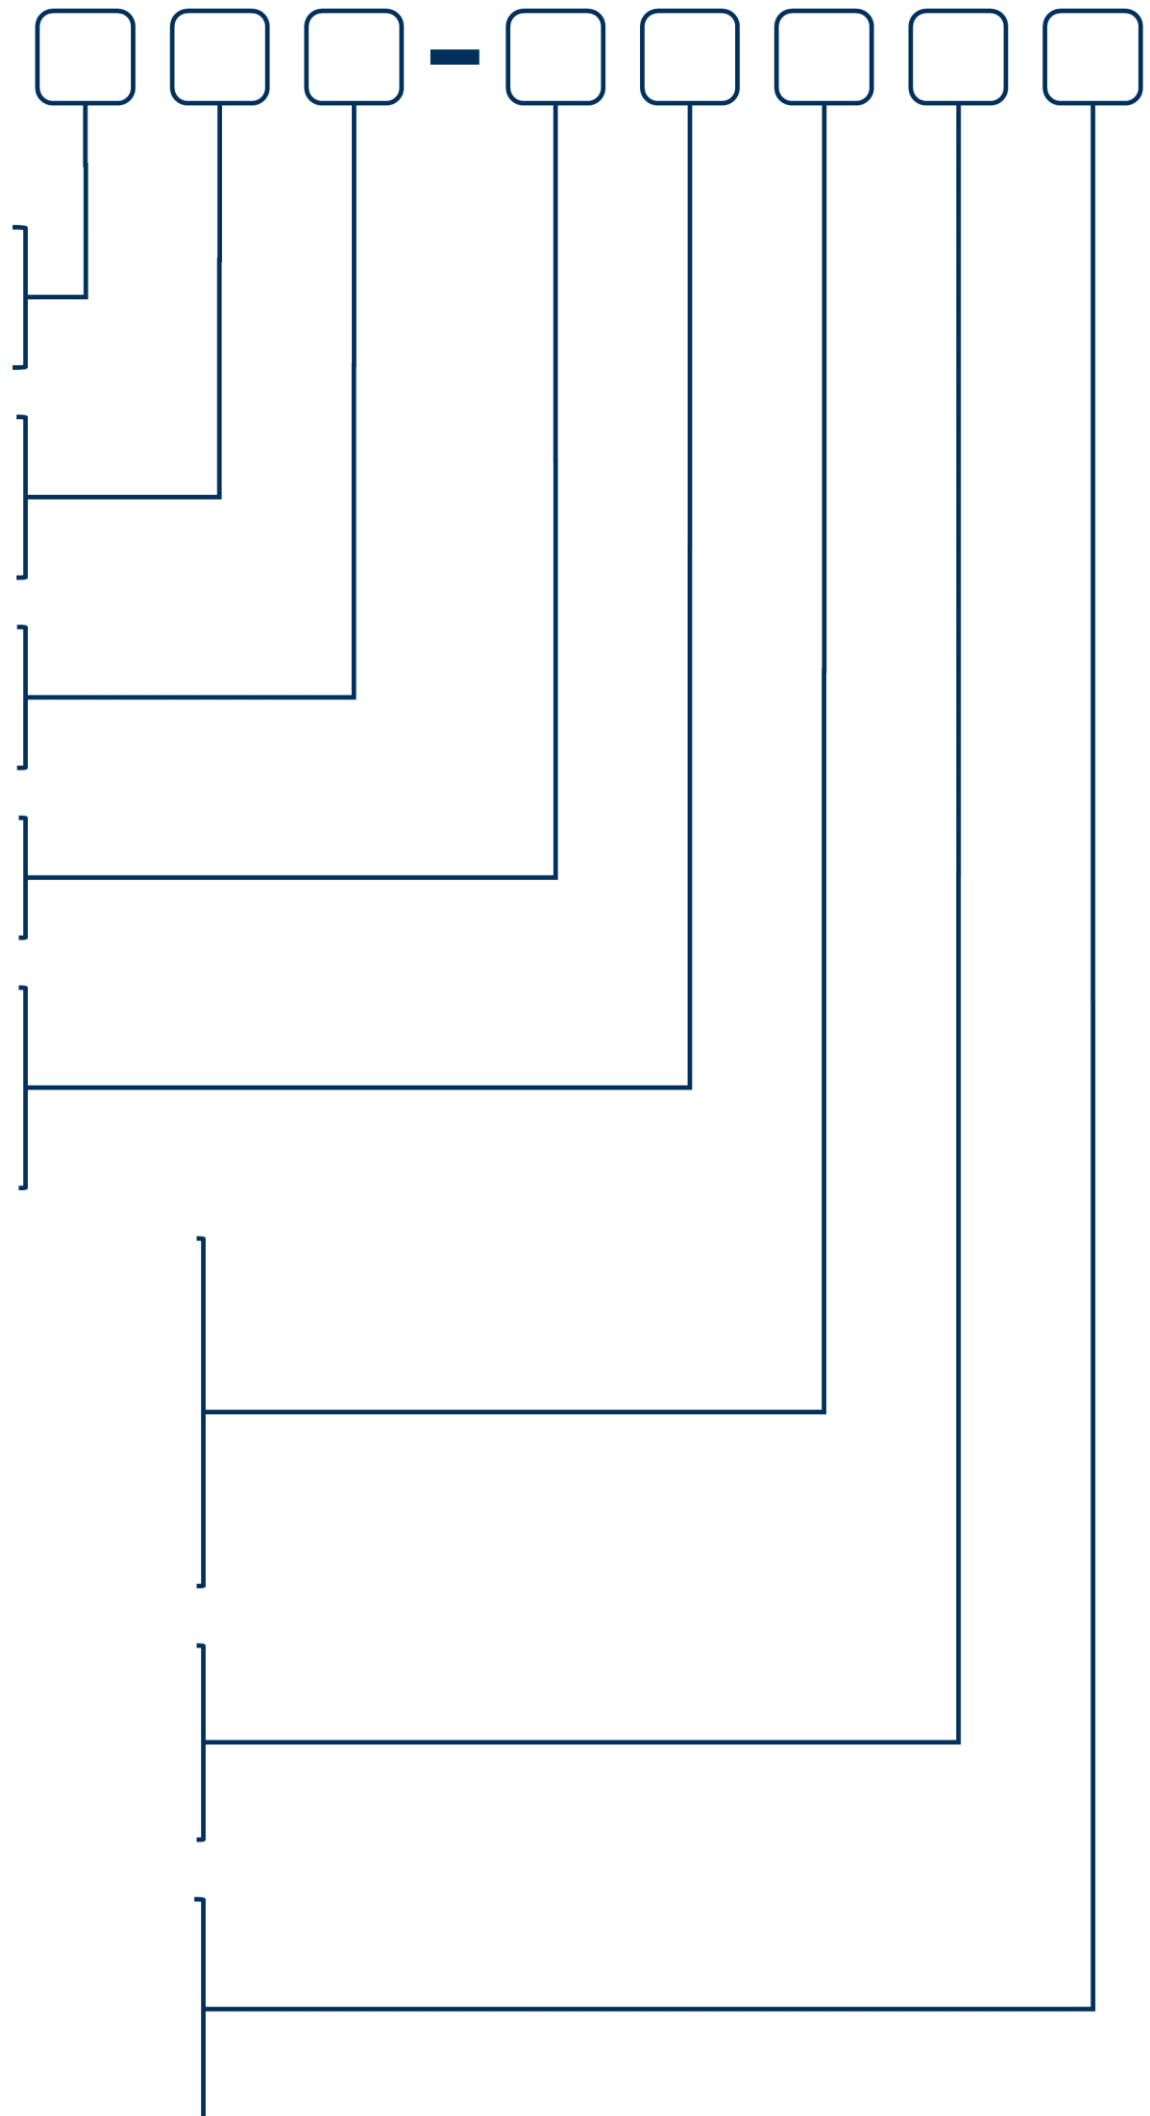

Brand

- B – BIWT
- O – OEM

Display Language

- I – English
- H – Hebrew

Power

- 1 – 110V
- 2 – 220V

Turbidity

- 0 – No Turbidity
- 5 – Turbidity*

Analog Output

- 0 – No Outputs
- 2 – 2 X 4-20mA
- 3 – 4 X 4-20mA

Additional power sockets

- 0- No
- 1- Power Sockets FR
- 2 -Turbidity*
- 3 - Power Sockets IL
- 4 - Turbidity + Power Sockets IL*
- 6- + Power Sockets US

Communication

- 0 – BIWT protocol Via Serial
- 1 – BIWT protocol Via Ethernet
- 2 – Modbus Protocol Via Serial

Parameters

- 0 – ORP Only
- 1 – Free Chlorine (0-10ppm)
- 2 – Free Chlorine (0-10ppm) + ORP

* When choosing Turbidity option – must setup back panel option 2 or 4

** Default parameters when choosing free chlorine Temperature, pH