

602 - **0** **0**

Brand

- B - BIWT
- C - OEM

Communication

- 0 - BIWT Protocol Via Serial
- E - BIWT Protocol Via Ethernet
- M - Modbus Protocol Via Serial

Power

- 1 - 110V
- 2 - 220V

Conductivity


- 0 - No Conductivity
- 1 - 300-10K μs^*
- 2 - 0-2k μs^*

Analog output

- 1 - 1 x 4-20mA
- 2 - 2 x 4-20mA
- 3 - 4 x 4-20mA*
- 4 - 6 x 4-20mA*

Parameters

- 0 - ORP Only
- 1 - Free Chlorine 0-10ppm
- 2 - Free Chlorine 0-2ppm
- 3 - Free Chlorine 0-10ppm +ORP
- 4 - Free Chlorine 0-2ppm +ORP

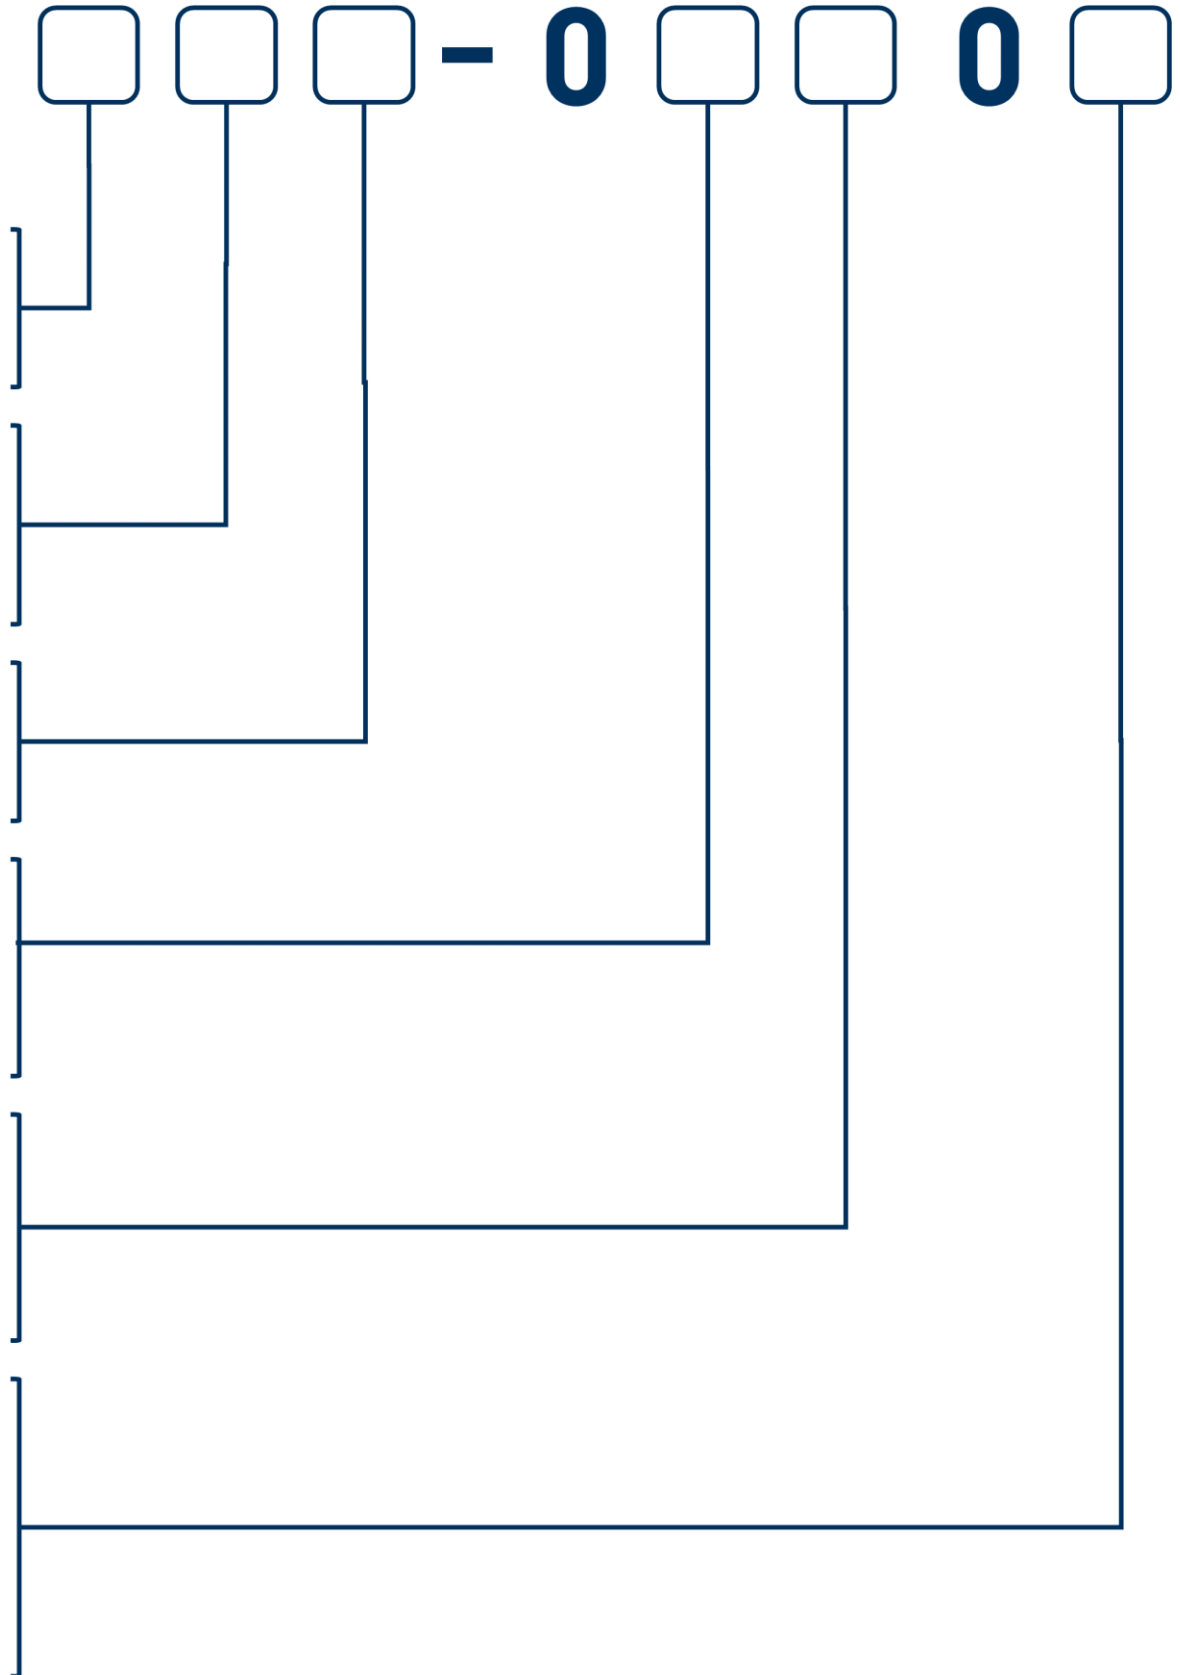

* When choosing Conductivity analog output option must be set to 3 or 4

** Default parameters: Temperature, pH